

# PSH30HW-8000W

Focusing on high-end industrial laser applications



---

## Typical Applications:

PSH30HW is specifically designed for high-power laser processing applications, making it an ideal choice for a wide range of uses, including high-power welding, laser cutting, drilling, materials processing, processing-on-the-fly, etc.

PSH30HW series provides 2 choices in accordance with different laser power employed by customer: PSH30HW-6000W is configured with water-cooling system and suitable for laser power up to 6kW applications; while PSH30HW-8000W is configured with both water-cooling and air-cooling systems and suitable for laser power up to 8kW applications.

PSH30HW series is optimized to achieve highest dynamic performance in high-laser-power scenarios up to 8-kilowatt range. Its highly encapsulated housing ensures exceptional air-tightness. This series demonstrates excellent beam reflection-resistant ability and prioritizes safety features with the unique design.

Specifications are subject to change without notice.  
Copyright © Precision Scan Inc. All Rights Reserved.



[www.precisionscan.ca](http://www.precisionscan.ca)

# PSH30HW-8000W



## Focusing on high-end industrial laser applications

### Mechanical Drawings (Dimensions in mm)

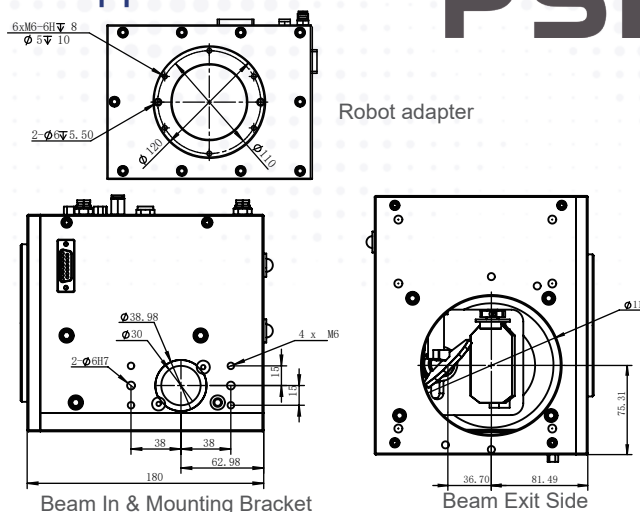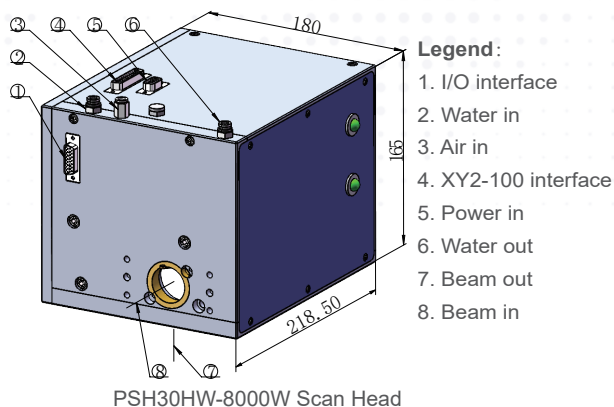

### Specifications

Specifications	PSH30HW-8000W
Maximum allowed average laser power <sup>(1)</sup>	8000 W
Cooling	Water & air
Aperture	30 mm
Typical scan angle <sup>(2)</sup>	$\pm 10^\circ$
Tracking error	$\leq 0.5$ ms
Step response time (1% of full scale )	$\leq 1.1$ ms
<b>Speed</b>	
Positioning / Jump <sup>(3)</sup>	$< 7$ m/s
Line scan <sup>(3)</sup>	$< 7$ m/s
Vector scan <sup>(4)</sup>	$< 1$ m/s
Good writing quality <sup>(3) (5)</sup>	260 cps
<b>Precision</b>	
Linearity	99.9 %
Repeatability	2 $\mu$ rad
<b>Temperature drift (with laser power &lt; 500W )</b>	
Offset	20 $\mu$ rad/ °C
Gain	20 $\mu$ rad/ °C
<b>Long-term drift (after 30 mins warm up) <sup>(6)</sup></b>	
Over 8 hours long-term offset drift	40 $\mu$ rad
Over 8 hours long-term gain drift	80 $\mu$ rad
Operating Temperature Range	25 °C $\pm$ 10 °C
Signal interface	Analog: $\pm 10$ V or $\pm 5$ V Digital: XY <sub>2</sub> - 100, PRS422 protocol
Input power requirement (DC)	$\pm 15$ V @ 5 A Max RMS

#### Note:

(1) For laser wavelength 1030-1090 nm.

(2) All angles are in mechanical degrees.

(3) With F-Theta objective f = 163 mm. Speed value varies correspondingly with different focal lengths.

(4) Repeatability and temperature drift are measured within this speed.

(5) Single-stroke font with 1 mm height.

(6) Long-term temperature drift is given under an ambient temperature environment of 25°C. and a working load under 500W. Temperature drift testing with high laser power is strictly prohibited. High laser power could induce thermal deformations in both the optical and mechanical systems, making it impossible to differentiate whether the drift is originating from galvanometer scanner itself or due to deformations in the optical and mechanical systems.